



Innovative design, efficient operation

With a cutting-edge industrial design, the Fiery® NX Station LS houses the Fiery NX Pro or NX Premium servers in a highly efficient workspace that optimises space usage and increases productivity.

Ergonomic operation

The adjustable-height workspace adapts to the operator's height for less fatigue and higher productivity. The display adjusts vertically and tilts for a better viewing angle.

High-efficiency work area

A proximity sensor changes the display from Fiery Ticker to the active application when it identifies someone approaching. This allows operators to resume work right away.

The compact design reduces the footprint by over 20% but still offers a large work area with a top tray to store commonly used items. Five USB ports are easy to access. A wireless mouse and keyboard save space and make the work area more flexible.

Quick and easy to install and maintain

The NX server glides out on a sliding shelf for easy installation and service access. Cables are neatly stored in the inside cabinet to keep them protected and out of the way. Plus, with the built-in internal power strip, you only need one wall outlet to power both the NX Station and the NX server.




Watch video:
fiery.efi.com/NXStationvideo


Six-inch, adjustable-height
table that accommodates
95% of the population.

Fiery QuickTouch for fast job and device management

The NX server includes the Fiery QuickTouch™ software on the touchscreen display, which gives users faster views of job status information and access to server management. With just a tap, the display gives operators easy access to intuitive system installation, backup and restore functionality, plus system diagnostics.

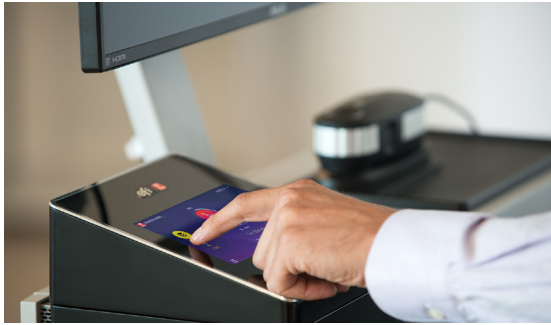


NX Station LS dimensions

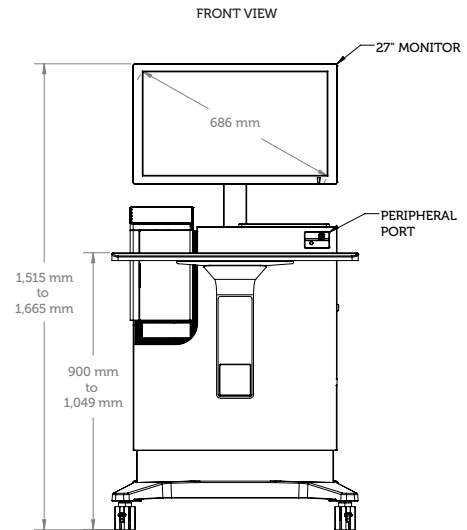

NX Station LS specs

- Display
 - 68.8 cm, resolution 1920 x 1080
 - Power consumption: 100–240 V, 50/60 Hz, 1.5 A
- Proximity sensor
- Wireless keyboard and mouse
 - One wireless USB adapter operates both keyboard and mouse
 - Wireless keyboard requires one AAA battery (included)
 - Wireless mouse requires one AA battery (included)
- NX Station has 2 USB 3.0 ports. Additional USB ports are available on the Fiery NX server.
- Shipping weight (without server): 71.4 kg approx.
- Standalone weight (without server or packaging): 68.3 kg
- Safety certifications
 - Tested in conjunction with Fiery server for mechanical stability
 - CE safety mark as described in CB scheme report
- Power cable
 - International power cable included with the Fiery server: 1.83 m long
- Four total casters; front two are lockable
- International power strip
 - One C13 inlet and four C14 outlets, each 10 Amps, 250 Volts
- Power: 100–240 V AC, 50/60 Hz
- Certification: cTUVus (Canada and US), CCC (China), PSE (Japan), KC (Korea), BSMI (Taiwan), CE Mark (Europe)

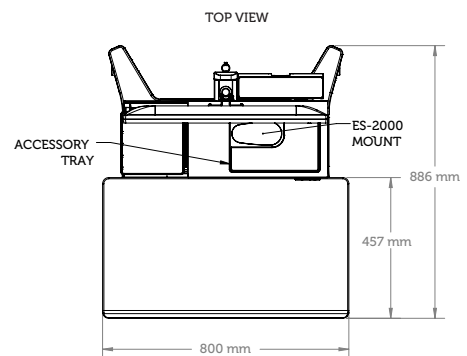

Watch video:
fiery.efi.com/NXStationvideo

EFI fuels success.

We develop breakthrough technologies for the manufacturing of signage, packaging, textiles, ceramic tiles, and personalised documents, with a wide range of printers, inks, digital front ends, and a comprehensive business and production workflow suite that transforms and streamlines the entire production process, increasing your competitiveness and boosting productivity.

Visit www.efi.com or call 0808 101 3484 (UK only) or +44 (0)1246 298000 for more information.



Nothing herein should be construed as a warranty in addition to the express warranty statement provided with EFI products and services.

The APPS logo, AutoCal, Auto-Count, Balance, BESTColor, BioVu, BioWare, ColorPASS, Colorproof, ColorWise, Command WorkStation, CopyNet, Cretachrom, Cretaprint, the Cretaprint logo, Cretaprinter, Cretaroller, Digital StoreFront, DirectSmile, DocBuilder, DocBuilder Pro, DockNet, DocStream, DSFdesign Studio, Dynamic Wedge, EDOX, EFI, the EFI logo, Electronics For Imaging, Entrac, EPCount, EPPPhoto, EPRegister, EPStatus, Estimate, ExpressPay, FabriVU, Fast-4, Fiery, the Fiery logo, Fiery Driven, the Fiery Driven logo, Fiery JobFlow, Fiery JobMaster, Fiery Link, Fiery Navigator, Fiery Prints, the Fiery Prints logo, Fiery Spark, FreeForm, Hagen, InkIntensity, Inkware, Jetrion, the Jetrion logo, LapNet, Logic, Metrix, MicroPress, MiniNet, Monarch, OneFlow, Pace, Pecas, Pecas Vision, PhotoXposure, PressVu, Printcafe, PrinterSite, PrintFlow, PrintMe, the PrintMe logo, PrintSmith, PrintSmith Site, PrintStream, Print to Win, Prograph, PSI, PSI Flexo, Radius, Remoteproof, RIPChips, RIP-While-Print, Screenproof, SendMe, Sincolor, Splash, Spot-On, TrackNet, UltraPress, UltraTex, UltraVu, UV Series 50, VisualCal, VUTEk, the VUTEk logo, and WebTools are trademarks of Electronics For Imaging, Inc. and/or its wholly owned subsidiaries in the U.S. and/or certain other countries.

All other terms and product names may be trademarks or registered trademarks of their respective owners, and are hereby acknowledged.