

Ricoh Streamline NX Integration with Fiery

Fiery servers driving Ricoh Multi-Function Devices integrate with Streamline NX cost accounting solution.

Please follow all documented installation/configuration steps in the Streamline NX documentation.

Compatible servers:

Fiery servers driving Ricoh Multi-Function Devices

Supported versions:

Streamline NX v.3.3.0

Connection modes:

Dual IP, Single IP (print only)

RICOH STREAMLINE NX	DUAL IP Both the Fiery and MFP device have a publicly accessible IP address		SINGLE IP Only Fiery connected to the network	
	Print	Pull Print (job release) from embedded client app	Print	Pull Print (job release) from embedded client app
	SUPPORTED	SUPPORTED	SUPPORTED	Not supported


Supported Workflows:

Fiery servers are compatible with the following Ricoh Streamline NX workflows:

- Accounting and reporting
- Authentication

61

- Printing from Fiery Driver (Windows & MAC)
- Secure printing / Job Release / Pull Print
 - User authentication using EFI drivers: the user must be logged into the domain
 - The local username on the PC/Mac must be the same as the username for the domain

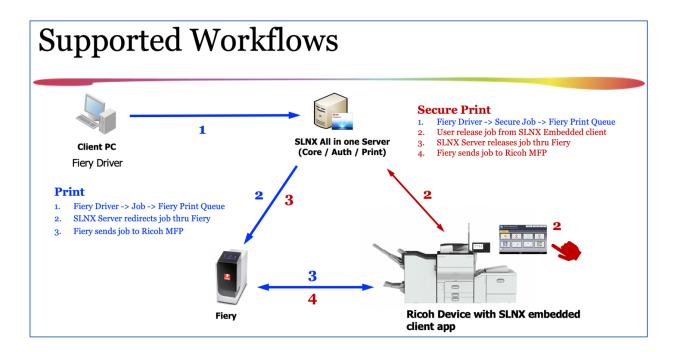

Fiery requirements:

Port 9100 must be enabled

Limitations:

- Do not support advanced Fiery driver features
- Prints from Fiery Command Workstation will not be tracked in SLNX Server