



Fiery® proServer SE

Digital front end

Streamlined, efficient production

Fiery® proServer SE is a turnkey digital front end for driving selected EFI™ printers, providing production tools, color management, workflow, and EFI FAST RIP technology. Its sleek industrial design delivers a highly effective and productive workspace.

The combination of EFI Fiery server technology and workstation provide the ideal ergonomic workspace for all users.

Efficient, space-saving design

The innovative design provides an efficient working environment for EFI printer users. The workstation optimizes space usage, and helps keep items needed for daily production within easy reach. The table offers a large work area to perform activities such as calibration and profiling. The wireless mouse and keyboard save space, and make the work area more flexible.

Three USB ports are easily accessible on the side of the QuickTouch display, and four additional USB ports are available at the rear of the server.

Fiery QuickTouch administration

Fiery QuickTouch™ software on the touchscreen display of the server gives access to server controls. With just a tap, the display gives operators easy access to essential server functions.

Learn about Fiery proServer features and full production capabilities at fiery.efi.com/proServer.




Fiery proServer SE specifications and options

- Operating system
 - Microsoft® Windows® 10 IoT Enterprise LTSC 2019
- RAM
 - 32 GB
- Hard drives
 - 1 TB
- CPU
 - 1 x Intel CORE I7-4770S, 3.1GHz
- Touch screen display
 - QuickTouch™ software
- Weight without packaging: 20.0 lbs (9.07 kg)
- USB ports
 - 3 USB 3.0 ports on the side of the QuickTouch display
- Fiery XF server software for Windows® including:
 - Spot Color support
 - FAST RIP
 - Color Profiler Option
 - Color Verifier Option
 - Cut Marks Option
 - EFI measurement device
 - Printer Option EFI
 - Unlimited macOS® or Windows® installations of Fiery Command WorkStation® (up to 10 concurrent connections)
- 1-year Fiery proServer hardware and Fiery XF software warranty

Fiery Workstation specifications

- Display
 - 22 in. (55.9 cm), resolution 1680 x 1050
- Wireless keyboard and mouse
 - One wireless USB adapter operates both keyboard and mouse
 - Wireless keyboard requires one AAA battery (included)
 - Wireless mouse requires one AA battery (included)
- Weight without server or packaging: 51.6 lbs, 23.4 kg
- Safety certifications
 - Tested in conjunction with Fiery server for mechanical stability
 - CE safety mark as described in CB scheme report
- Power consumption
 - 100-240V, 50/60Hz, 1.2A
- Four total casters; front two are lockable

Fiery proServer SE dimensions

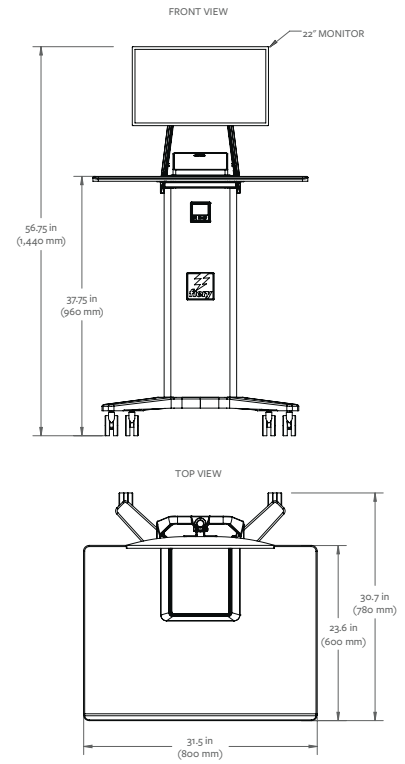

We develop breakthrough technologies for the manufacturing of signage, packaging, textiles, ceramic tiles, building materials and personalized documents, with a wide range of printers, inks, digital front ends, and a comprehensive business and production workflow suite that transforms and streamlines the entire production process, increasing your competitiveness and boosting productivity. Visit www.efi.com or call 650-357-3500 for more information.



Nothing herein should be construed as a warranty in addition to the express warranty statement provided with EFI products and services.

AutoCal, Auto-Count, Best Eye, ColorGuard, ColorPASS, ColorRight, ColorWise, Command WorkStation, Cretachrom, Cretaprint, the Cretaprint logo, Cretaprinter, Cretaroller, Digital StoreFront, Divisional Graphics, Distancing Graphics, DocBuilder, Dynamic Wedge, EDOX, EFI, the EFI logo, Electronics For Imaging, EPCount, EPPhoto, EPRegister, EPStatus, Estimate, FabriVU, Fast-4, FASTRIP, FASTDRIVE, Fiery, the Fiery logo, Fiery Compose, Fiery Driven, the Fiery Driven logo, Fiery DesignPro, Fiery Edge, Fiery Impose, Fiery ImageViewer, Fiery Intensify, Fiery JobExpert, Fiery JobFlow, Fiery JobMaster, Fiery Navigator, Fiery Prints, the Fiery Prints logo, FreeForm, GameSys, Hagen, Inkintensity, Inkware, IQ, iQuote, LapNet, Lector, Logic, MarketDirect StoreFront, MarketDirect VDP, MarketDirect Cross Media, Metrics, Metrix, MicroPress, Monarch, Monarch Planner, OneFlow, Optima, Optitex, Organizing Print, Pace, Pecas, Pecas Vision, PC-Topp, PressVu, PrinterSite, PrintFlow, PrintMe, the PrintMe logo, PrintSmith, PrintSmith Site, PrintSmith Vision, PrintStream, Profile®, Process Shipper, Prograph, ProGraphics, PSI, PSI Flexo, Radius, RIPChips, RIP-While-Print, SafeGuard Graphics, Spot-On, Spot Pro, Synchro 7, Technique, UltraDrop, UltraPress, UltraTex, UltraVu, UV Series 50, VisualCal, VUTEK, the VUTEK logo, and WebTools are trademarks or registered trademarks of Electronics For Imaging, Inc. and/or its wholly owned subsidiaries in the U.S. and/or certain other countries.

All other terms and product names may be trademarks or registered trademarks of their respective owners and are hereby acknowledged.